

# New Foamable Hytrel® Meets Demand for Innovative, Sustainable Consumer Applications



Unlike foamed materials that rely on chemical foaming agents, new foamable Hytrel® is produced using CO<sub>2</sub> and N<sub>2</sub> gases, which are part of the time-tested and proven SCF process. This offers these benefits:

- No residues from chemical foaming agents in the final products
- No VOCs are emitted, so GWP (Global Warming Potential) is reduced
- No odors or allergens present
- Skin-contact compatible foam material


Featuring reduced weight, low thermal conductivity, high strength to weight ratio, and noise reduction, foamable Hytrel® is widely used in sporting goods, and offers excellent possibilities for consumer goods, automotive, and furniture applications. DuPont brings this high-performance polymer together with the proven and innovative supercritical foaming process for higher efficiency, greater yield rates, and recyclability.

Polymer foams are extremely lightweight and versatile, highly durable, and mildew resistant. These are a few of the reasons why they are found in numerous consumer applications. The demand for high-quality consumer products for growing and aging populations has led to innovation and development in this material segment.


Polymer foams are primarily manufactured using various foaming processes such as bead, extrusion, injection molding, and batch methods. Some traditional materials and processes have limitations, though. For example, cross-linked foam material is non-biodegradable, requires a high amount of energy to produce, and emits VOCs.

To meet the rising demand for more innovative foam materials, DuPont recently applied the proven supercritical fluid (SCF) process to Hytrel® TPC-ET to create a new, more sustainable foam. Applying SCF to Hytrel® creates a closed-cell foam that offers lower environmental impact, expanded performance, and greater design freedom.

Service Temperature Range Comparison for Thermoplastic Elastomers

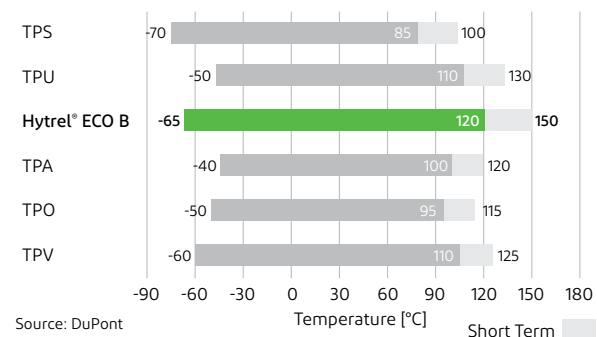

## Hytrel® Properties After Foaming Comprehensive Comparison

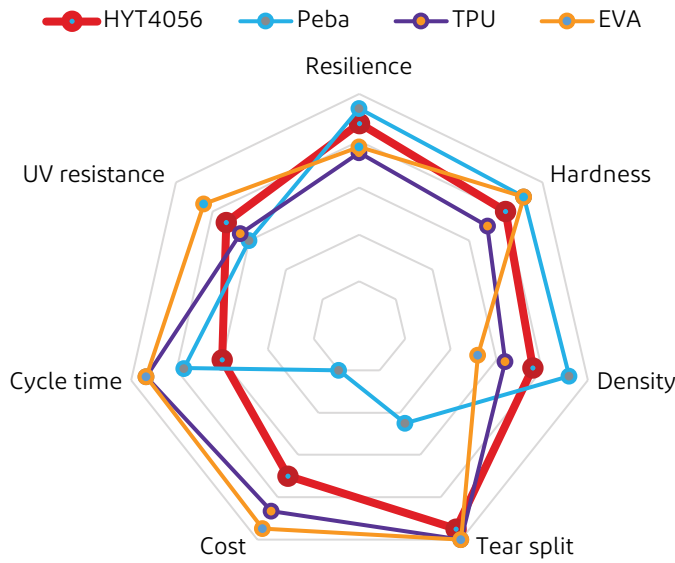

Source: DuPont

High efficiency, shortened foaming process  
Reduces adhesives with total Hytrel® integrated design solution

### Performance

- High resilience (material contributed 15% increase, under the same hardness, density, foaming process)
- Lower density without hardness compromise (0.10-0.16)

### Sustainability

- Green process without chemical foaming agent
- 100% Recyclable
- No VOC concern

## Discover more

For more information about foamable Hytrel® TPC-ET solutions for sporting goods, footwear, furniture, and automotive applications, contact your DuPont representative.

[dupont.com](http://dupont.com)



## Midsole Results Using Foamable Hytrel®

Test Item	Unit	EVA	TPEE
Hardness	ASKER C	40-45	40-45
Specific Gravity	g/cm <sup>3</sup>	0.19-0.20	0.14-0.18
Tensile Strength	kg/cm <sup>2</sup>	22	45
Elongation	%	156	300
Split Tear	N/mm	2.29	2.0
Resilience	%	60	70-75
Compression Set	%	40	25

Source: Data from customer trials

## Insole Performance Using Foamable Hytrel®

Test Item	Unit	
Density	g/cm <sup>3</sup>	0.1-0.12
Hardness	Shore C	25-30
Tensile Strength	MPa	2.8
Elongation at Break	%	280
Method A Tear (Trouser)	N/cm	35
Compression Set	%	25
Ball Resilience	%	75-80

Source: Data from customer trials

## Why Choose Foamable Hytrel®?

Foamable DuPont™ Hytrel® combines the flexibility of rubber with the strength and processability of thermoplastics for better resilience, heat resistance, chemical resistance, and foamed properties. It is compatible with multiple processing options, including bead, sheet, and injection foaming methods.

Other advantages include:

- High resilience at low density
- Wide hardness range
- Broad service temperature range
- Outstanding durability
- Reworkable, recyclable
- Biomass-based grade for lower Global Warming Potential (GWP) available, drop-in replacement

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2022 DuPont.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

Form No. 001-20824-HMC0822