


# Optical fiber cable solutions from DuPont

Digital transformation is bringing immediate and significant challenges to the communications industry. 5G adoption, growth of hyperscale data centers, and expansion of the Internet of Things all require the communication infrastructure to handle increasing quantities of data effectively on a global scale. Fiber optics offer significantly greater bandwidth potential and are increasingly favored over traditional co-axial cables.

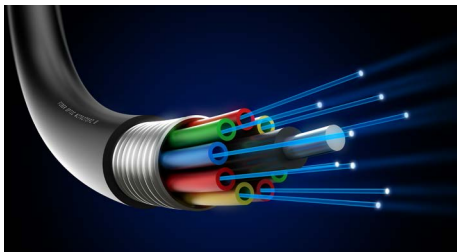

## Industry needs

These trends are driving the need for stricter requirements on polymers used for optical fiber constructions, such as those for tight buffers, loose tubes, and jacketing. Preferred performance benefits include:

- Very good physical properties to protect the fibers from external environment
- Flexibility to allow faster and easier installation
- Allowing thin wall designs — more fibers must be bundled in reduced cable diameters
- Safety and reliability to help new cable designs comply with local or global regulations
- Good extrusion processability to control costs

## Solutions

DuPont™ Hytrel® thermoplastic elastomers and DuPont™ Crastin® PBT resins enable our customers to design next generation cables that meet the highest performance standards. We combine global scientific leadership in specialty elastomers, engineering resins, and additives with unmatched collaborative and testing capabilities to help our customers engineer, process, and deliver high-performing cable insulation and jacket materials.

### About Hytrel®

For the design and manufacture of optical fiber cables, Hytrel® thermoplastic elastomers provide the flexibility of rubbers, the strength of plastics, and the processability of thermoplastics. These products are durable, enable fast and easy assembly, and offer improved processing and coloring. Specific benefits include:

- Strength and flexibility without plasticizers
- Flexibility at low temperatures
- Abrasion resistance
- Excellent heat and chemical resistance
- Outstanding flex fatigue and resistance to tearing/flex cut growth
- Protect fiber from mechanical damage and external environment
- Specific grades for easy peel, allowing time savings for installation without stripping tools
- Good tear resistance
- Easy processing, very low wall thickness is possible
- Smooth surface aspect
- Low post shrinkage and coefficient of linear thermal expansion

### About Crastin®

Crastin® PBT is the resin of choice for cost-effective high-performance optical fiber cables across a wide range of electrical and electronic applications. Specific benefits for optical fiber cables include strong mechanical properties, contributions to a stable manufacturing process, and low signal attenuation attained by:

- Enabling thin wall constructions and good kink resistance
- High flexural modulus and elongation at break
- Excellent low-temperature impact resistance
- Consistent hydrolysis performance and stress crack resistance
- Maintaining tubes OD/ID (dimensions)
- Fast line speed and start-up
- Isotropic shrinkage
- Low post shrinkage and coefficient of linear thermal expansion

## Solutions for Loose Tubes

Crastin® grade	Density g/cm <sup>3</sup>	Melt-mass flow rate @ 250° C (g/10 min, 2.16kg)	Flex modulus (MPa)	Strain at break (%)
Crastin® 6129	1.32	10	2400	>200
Crastin® 6130	1.30	16	2400	>200
Crastin® S600F10	1.30	11	2400	>200
Crastin® ST830FRUV*	1.37	3 (3Kg)	2100	>50

\*Super tough UV stabilized FR grade (UL94V-0 @0.85mm)

## Solutions for tight buffers

Recommended grades	Density g/cm <sup>3</sup>	MFR (g/10min, 2k16)	Flex modulus (MPa)	Hardness max shore D	Stress at break (MPa)	Strain at break (%)
Hytrel® 5556	1.19	7.8 @ 220°C	190	55	40	>300
Hytrel® 5555HS	1.19	8.5 @ 220°C	195	55	35	>300
Hytrel® 6356	1.22	9 @ 230°C	290	63	43	>300
Hytrel® 7246	1.26	13 @ 240°C	550	68	50	>300
Hytrel® 8238	1.28	12.5 @ 240°C	1150	76	46	>300
Hytrel® HTR6108*	1.25	5.1 @ 190°	170	61	32	290

\*For translucent applications

## Solutions for mini loose tubes

Recommended grades	Density g/cm <sup>3</sup>	MFR (g/10min, 2k16)	Flex modulus (MPa)	Hardness max shore D	Stress at break (MPa)	Strain at break (%)
Hytrel® HTR8351*	1.15	10 @ 190°C	21	24	9	210
Hytrel® G3548	1.15	10 @ 190°C	25	35	10	190

\*Easy strippability for installation without tools

## Solutions for cable outer jacket

Grades	Density g/cm <sup>3</sup>	Flex modulus (MPa)	Hardness max shore D	Stress at break (MPa)	Strain at break (%) <sup>1</sup>
Hytrel® HTR8813*	1.23	370	58	11	150
Zytel® LC6200**	1	1000	69	35	>150

<sup>1</sup> 50 mm.min-1

\* NHFR grade, V-0 @1.5mm, LOI 49%

\*\* PA612-HI and for additional information on Zytel®, please visit [dupont.com/mobility-materials](http://dupont.com/mobility-materials)

[dupont.com/mobility-materials](http://dupont.com/mobility-materials)

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2021 DuPont.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.



Electrical and Electronics

Form No. 001-20670-HMC0921